



# SLIM FAST

OPT-SLIM-Y IS A SUPER-LIGHT, ULTRA-THIN, HD LED DISPLAY. MODULES ARE FRONT AND REAR SERVICEABLE AND BUILT ON AN ALUMINUM CABINET. IT TAKES ABOUT 3 SECONDS TO REMOVE A TILE. GO AHEAD AND TIME US.



## OPT-SLIM INDOOR LED DISPLAY TECHNOLOGY



**±1300 NITS  
24/7 RELIABILITY**

±100,000<sup>1</sup> HOURS LIFETIME.  
24/7 PLAYBACK RELIABILITY.  
\*APPROXIMATE

**2.6-4.8MM**

**PIXEL PITCH  
OPTIONS**

HIGH PIXEL DENSITY AND  
DEFINITION. BEZEL-FREE  
SMD LED MODULE.



**PIXEL BY PIXEL  
CALIBRATION**

CALIBRATE EACH PIXEL  
FOR UNIFORM BRIGHTNESS  
AND COLOR.



**140° HORIZONTAL  
VIEWING ANGLE**

VIEW THE DISPLAY EASILY  
FROM MULTIPLE ANGLES. WIDE  
VIEWING ANGLES CREATE  
GREATER VISUAL IMPACT.



**CONNECTIVITY**

NETWORK WITH  
ETHERNET<sup>2</sup>, WIFI<sup>3</sup>, OR  
CELLULAR<sup>2</sup> TECHNOLOGY.  
\*OPTIONAL



**FRONT/REAR  
SERVICEABLE**

QUICK RELEASE TILES  
ALLOW FOR FAST, EASY  
FRONT OR REAR MODULE  
MAINTENANCE.



**LIGHTWEIGHT  
CABINET DESIGN**

SLIM 3.28" (DEPTH) AND  
LIGHTWEIGHT 15 LB<sup>3</sup>  
ALUMINUM CABINET DESIGN.  
\*APPROXIMATE



**60 FPS  
VIDEO PLAYBACK**

SMOOTH FULL MOTION  
VIDEO PLAYBACK.



**CLOUD-BASED  
SOFTWARE<sup>4</sup>**

CONTROL, NETWORK, AND  
DIAGNOSE DISPLAYS FROM  
ANYWHERE WITH DNET 3.0.  
\*OPTIONAL

# OPT-SLIM

## INDOOR LED DISPLAY TECHNOLOGY



Module Front



Module Rear

### Display

Pixels (mm)		2.6	3.9	4.8
Brightness (Nits)		±1,000	±1,300	±1,300
SMD Module Matrix (HxW)	A.		128x128	104x104
	B.	384x192	256x128	208x104
Power (Watt/Module)	A.		120w	125w
	B.	240w	240w	250w
Color	281 Trillion Colors			
Viewing Angle	140° Horizontal; 120° Vertical			
Contrast Enhancement	Black Mask & Tinted LED			
Contrast Ratio	3000 : 1			
Dimming	100 Levels			
Average LED Lifetime	±100,000* Hours			
Color Temperature	6500K (Adjustable)			

### Graphic & Video Support

Display Capability	Video, Graphic, Text
Video Frame Rate	60 FPS
Refresh Rate	±1920 Hz (Adjustable)

### Enclosure

Module Construction	Die-Cast Aluminum
Serviceability	Front or Rear
Module Size: 19.68" h x 19.68" w x 3.28" d	Module Weight: 15 lbs*
Module Size: 39.37" h x 19.68" w x 3.28" d	Module Weight: 29 lbs*

### Communication


Communication	Ethernet*, WiFi*, Fiber Optic*, Cellular*
---------------	---

### Electrical & Operating Requirements

Power (Highest Avg. Watt/Module)	±250w
AC Power	110/220VAC 60Hz.
Operating Temp. / Humidity	±32°~113°F / ±10~90%

### Software

PC / Cloud-Based	M.E. Pro Plus; DNet 3.0*
------------------	--------------------------

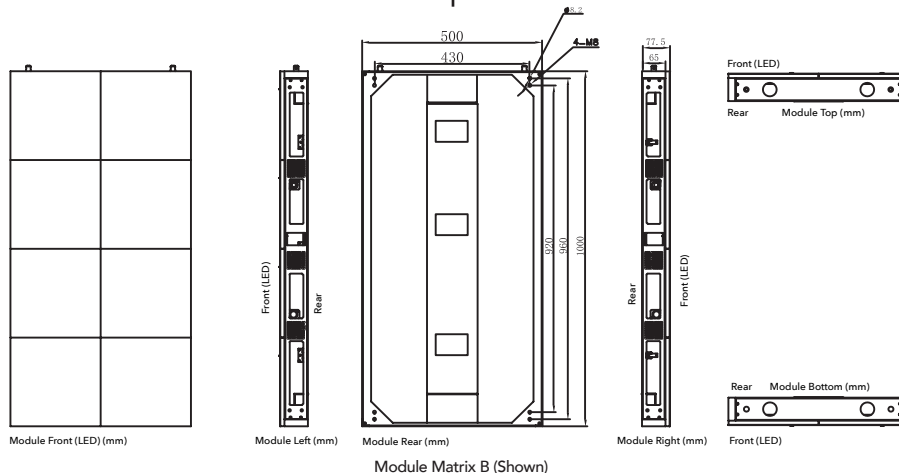

Worldwide Headquarters  
 1700 S. De Soto Place, Ontario, CA 91761 USA  
 Phone: +1.800.876.1668 Fax: +1.626.369.7858  
[www.optec.com](http://www.optec.com)